

HEAT-SHRINKABLE MV OUTDOOR TERMINATIONS FOR SINGLE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN  
Up to 19/33 (36) kV

### Application

The "MONOe" terminations are a single component solution, for single core polymeric cables.

### Technical description

The "MONOe" outdoor terminations are designed for max system voltages of 36 kV.

Easy, quick to install, reducing installation time and errors.

The kit consists of a stress control mastic strip, a co extruded dual wall tube, red anti-tracking sealing mastic and anti-tracking rain sheds.


Add on kit for armored cables are available separately.

Each MONOe termination kit contains material to allow for 3 phase installation.



Type tested acc.:  
Cenelec HD 629.1 S2  
IEC 60502-4

Um kV	type	section range (mm <sup>2</sup> )	L (mm)	Insulation (mm)	Outer sheath (mm)
12	3x12MONOe1.95	25÷95	400	12-20	20-32
12	3x12MONOe1.240	70÷240	400	18-32	24-40
12	3x12MONOe1.400	185÷400	420	20-34	30-48
12	3x12MONOe1.630	400÷630	450	26-38	44-56
24	3x24MONOe1.95	25÷95	420	16-24	28-40
24	3x24MONOe1.240	70÷240	440	18-32	32-46
24	3x24MONOe1.400	185÷400	480	22-36	42-52
24	3x24MONOe1.630	400÷630	510	30-44	44-58
36	3x36MONOe1.95	25÷95	480	20-30	30-44
36	3x36MONOe1.240	70÷240	480	24-36	38-52
36	3x36MONOe1.400	185÷400	510	28-42	44-60
36	3x36MONOe1.630	400÷630	560	40-52	48-68

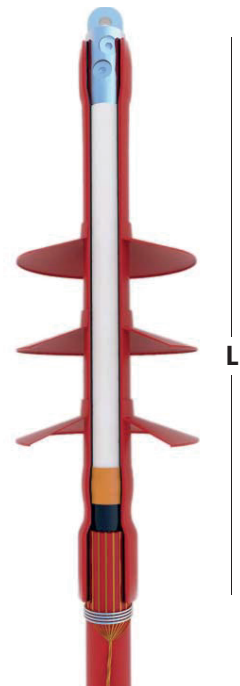

Designed for outdoor application.



For cables with AL foil screen/ vapor screen please contact our sales office.



Please add the letter "A" at the end of the product code for cables with Cu tape screen.



Earth kit included for cables with wire screens.



For other cable types please contact our sales office.



Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page.



Various earth connection design solutions exist for armoring. For exact details contact our sales office.



Design accommodates various lug types.



Various earth connection kits are available for screen connection. For exact details contact our sales office.